

The Aglass VT150A Sewage Pump Station

UNIT COMES FULLY ASSEMBLED


LID OPTIONS:

ALL LIDS ARE GAS-TIGHT

CLASS B - MEDIUM DUTY
 CLASS D - HEAVY DUTY
 600mm ROUND
 600mm SQUARE
 BRASS EDGE (FOR TILING)

WORKING CAPACITY 200L
 MAXIMUM CAPACITY 220L

SIDE ELEVATION (SECTION)

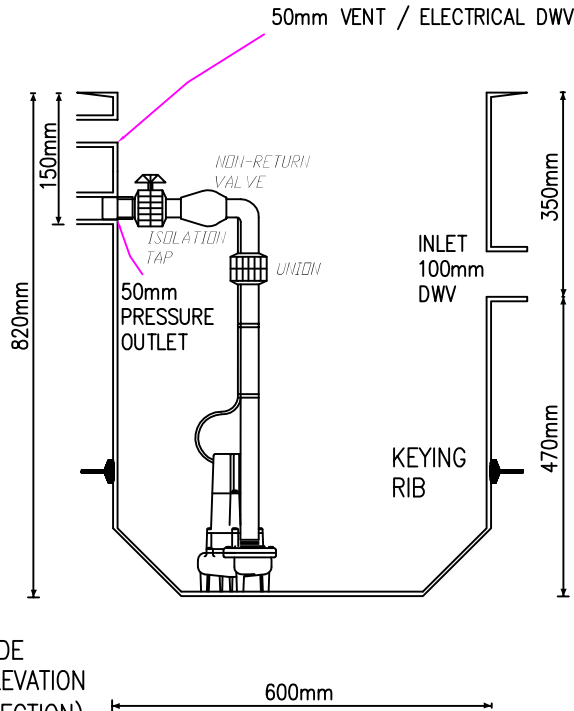

STANDARD FEATURES:

- 50 MM BRASS SWING CHECK VALVE
- 50 MM PRESSURE UNION
- SUBMERSIBLE SEWAGE CUTTER PUMP (240/415 VOLTS)
- INLET, OUTLET AND VENT
- ISOLATION TAP

OPTIONAL EXTRAS:

- HIGH LEVEL ALARM
- PIT RISERS

TANK IS DESIGNED FOR ABOVE AND BELOW GROUND INSTALLATION

AUSTRALIAN STANDARDS:

AS1170-P1
 AS2634
 AS1546


APPLICATIONS:

- GRANNY FLATS
- BOAT SHEDS
- BUILDING SITES ETC

OTHER PUMP STATIONS ALSO AVAILABLE

THIS DOCUMENT IS CONFIDENTIAL. THE COPYRIGHT THEREIN IS VESTED IN AGLASS PTY LTD KIRRAWEE, NSW, AUSTRALIA. RECIPIENTS MUST OBTAIN THE WRITTEN AUTHORITY OF THE SAID COMPANY BEFORE WHOLLY OR PARTLY DUPLICATING THE CONTENTS OR DISCLOSING SAME TO OTHERS. ALL RIGHTS RESERVED.

	SIGNATURE	DATE
DRAWN	SS	10-07-11
CHECKED	KA	10-07-11
APPR'D	KA	10-07-11
DRAWING NUMBER:		REV 0
SCALE:	NTS	SHEET SIZE A4



PH (02) 9542 6511
 FAX (02) 9542 6561
 EMAIL info@aglass.com.au
 WEB www.aglass.com.au
AGLASS PTY LTD