


The Aglass VT900A Sewage Pump Station

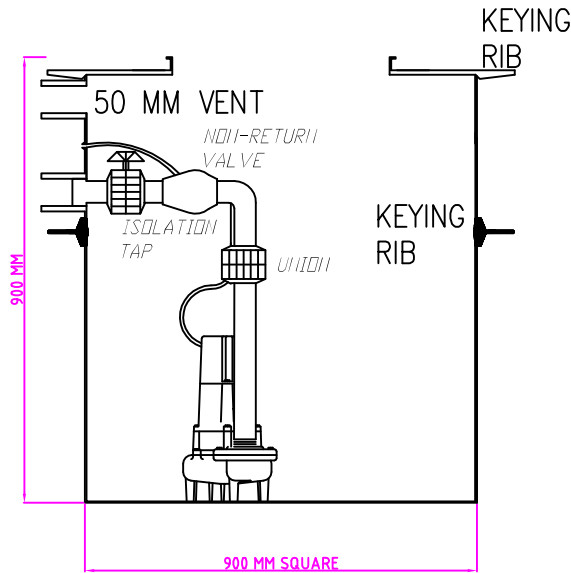

STANDARD FEATURES:

- 50 MM BRASS SWING CHECK VALVE
- 50 MM PRESSURE UNION
- SUBMERSIBLE SEWAGE CUTTER PUMP (240/415 VOLTS)
- INLET, OUTLET AND VENT
- ISOLATION TAP
- LIFT CHAINS

OPTIONAL EXTRAS:

- HIGH LEVEL ALARM
- CONTROL PANEL FOR DUAL PUMPS
- SLIDE RAIL KITS
- PIT RISERS

WORKING CAPACITY
750L
MAXIMUM CAPACITY
900L

TANK IS DESIGNED FOR
ABOVE AND BELOW
GROUND INSTALLATION

AUSTRALIAN STANDARDS:

AS1170-P1
AS2634
AS1546

APPLICATIONS:

- BOAT SHEDS
- DOMESTIC DWELLINGS
- DUPLEXES
- TOILET BLOCKS
- BUILDING SITES
- ETC


PLUMBER TO NOMINATE SIZE
AND POSITION OF INLET

FOR PUMP OPTIONS INCLUDING
DIAGRAMS AND PERFORMANCE
CURVES
CONTACT AGLASS PTY LTD

OTHER PUMP STATIONS ALSO AVAILABLE

THIS DOCUMENT IS CONFIDENTIAL. THE COPYRIGHT THEREIN IS VESTED IN AGLASS PTY LTD KIRRAWEE, NSW, AUSTRALIA. RECIPIENTS MUST OBTAIN THE WRITTEN AUTHORITY OF THE SAID COMPANY BEFORE WHOLLY OR PARTLY DUPLICATING THE CONTENTS OR DISCLOSING SAME TO OTHERS. ALL RIGHTS RESERVED.

	SIGNATURE	DATE
DRAWN	SS	24.3.10
CHECKED	KA	24.3.10
APPR'D	KA	24.3.10
DRAWING NUMBER:		REV 0
SCALE:	NTS	SHEET SIZE A4



PH (02) 9542 6511
FAX (02) 9542 6561
EMAIL Info@aglass.com.au
WEB www.aglass.com.au
AGLASS PTY LTD